

CAFETERIA TROLLEYS

A large range:


Tournus offers 14 standard models of trolley for trays measuring 350 x 270 mm to 530 x 325 mm.

Low trolleys:

- 12-tray trolley, 2x6 levels.
- 12-tray trolley, 2x6 levels, with top tray.
- 18-tray trolley, 3x6 levels, with top tray.

Tall trolleys :

- 12-tray trolley, 1x12 levels, insertion widthways, one stack.
- 24-tray trolley, 2x12 levels, insertion widthways, two stacks.
- 24-tray trolley, 2x12 levels, insertion lengthways, two stacks.

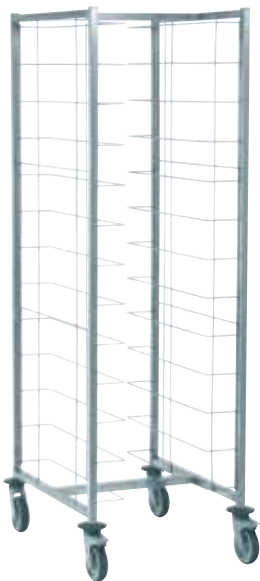

Trolley with 2x6 levels, insertion widthways with two stacks (side by side), with upper tray.

Ergonomics:

The H-shaped design of the trolleys (tall models and low models without top tray) means they are semi-stackable, thus saving space during transport and storage.

The low trolleys are ideally suited to the size of children. The upper tray, with its raised edge on all 4 sides, avoids items placed on top of the trolleys falling off, and retains any liquids.

Trolleys with side panels: the laminated panels fixed with clips are easy to remove for thorough cleaning. The panels can also be installed on trolleys that did not have any originally



Trolley with 2x12 levels, insertion widthways with two stacks (side by side), with side panels.

Trolley with 2x12 levels, insertion lengthways with two stacks (back to back).

Anti-fall clips
for trays on each
tier

Sturdiness:

Thanks to the uprights made of 25 x 25 mm tube and the 4.8 mm diameter stainless steel wires, the trolleys are very sturdy and corrosion-resistant. They are built on an automatic welding bench. This product process ensures perfectly even welds.

The trolleys come with 4 stainless steel swivel wheels with polyamide cover and stainless steel axle and ball. The ball bearing guarantees the rolling quality and optimum resistance with time. Two wheels are braked so that the trolleys can be immobilised. The wheel treads and protective bumpers are of the non-marking type.

Colours:

Beige

Personalisation is done by bonding a resistive film (cleaning resistant). We offer a choice of 15 colours covering cladding (swatch on request).


STANDARD COLOURS TO MATCH THE CLADDING OF DISPENSING UNITS

U504-ST9 Cosmic Blue	U323-ST9 Cherry-red	U114-ST9 Sunflower-yellow	U630-ST9 Apple-green	U999-ST9 Black
W1100-ST9 Alpine White	U830-ST9 Terracotta nude	F500-ST20 Metallic stainless steel	F187-ST9 Dark grey Chicago concrete	F186-ST9 Light grey Chicago concrete
H3860-ST9 Champagne American maple	H1145-ST10 Natural Bardolino Oak	H1180-ST37 Halifax Natural Oak	H3171-ST12 Oiled Kendal Oak	H3146-ST9 Lorenzo Oak Sand

Trolleys can also be personalised with your logo or that of your customers: please make enquiries with us.

25 avenue Jean Moulin - CS2005
71700 TOURNUS - FRANCE
RC Mâcon B 383 567 104
Code APE 295 E
SAS Capital 16 355 625€

CONTACT
Tél : + 33 (0)3 85 27 42 65
E-mail : export@tournus.com

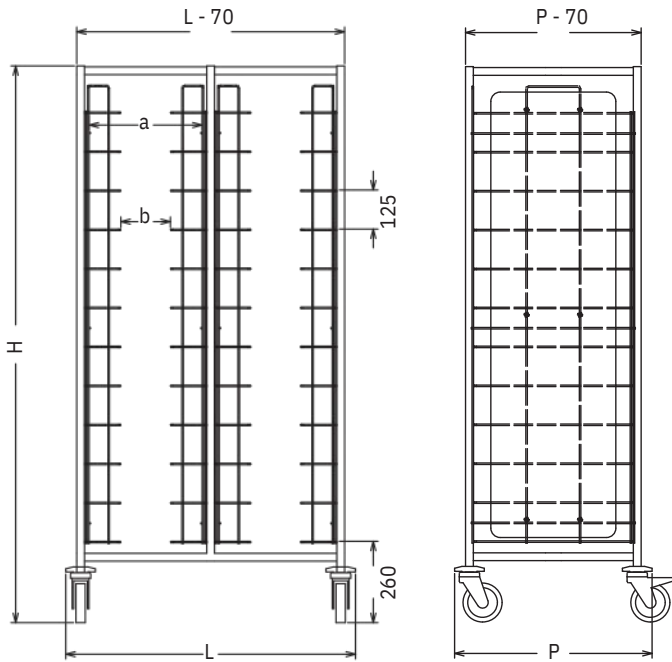

Trolley with 2x12 levels, insertion widthways (with two stacks, side by side). Front view.

Trolley with 2x12 levels, insertion widthways (with two stacks, side by side). Side view.

Construction:

- Welded stainless steel.
- Stainless steel 25x25 mm tube structure.
- Stainless steel 50 x 25 mm tube lengthwise spacer.

Wire panels:

Stainless steel wires, Ø 4.8 mm

Laminate panels:

Thickness 2 mm fixed by clips onto the wire panels.

Upper tray:

Welded stainless steel.

Wheels:

- 4 swivel wheels Ø 125 mm, 2 with brakes.
- Polyamide cover, stainless steel axles and ball bearing.
- Rubber tyre, non marking type.
- Round bumpers.

Description	Tray width (mm)	L (mm)	D (mm)	a (mm)	b (mm)	H (mm)	Trolleys with no panels Ref.	Trolleys with panels Ref.
Low models								
Trolleys with 2x6 levels, insertion widthways (with two stacks, side by side).	320 to 370	930	630	360	160	1030	800 071	800 072
Trolleys with 2x6 levels, insertion widthways (with two stacks, side by side) with top tray	320 to 370	930	630	360	160	1040	800 073	800 074
Trolleys with 3x6 levels, insertion widthways (with three stacks, side by side) with top tray.	320 to 370	1340	630	360	160	1040	800 075	800 076
Tall models: insertion widthways								
Trolleys with 1x12 levels, insertion widthways (one stack).	320 to 370	510	630	360	160	1790	800 081	800 082
Trolleys with 2x12 levels, insertion widthways (with two stacks, side by side).	320 to 370	930	630	360	160	1790	800 091	800 092
Description	Tray width (mm)	L (mm)	D (mm)	a (mm)	b (mm)	H (mm)	Trolleys with no panels Ref.	Trolleys with panels Ref.
Tall models: insertion lengthways								
Trolleys with 2x12 levels, insertion lengthways (with two stacks, back to back).	400 to 480	620	790	490	285	1790	800 093	800 094
Trolleys with 2x12 levels, insertion lengthways (with two stacks, back to back).	480 to 560	700	790	570	365	1790	800 095	800 096